


Exhibit Accessory Panel



Scan our QR code to view assembly video

Monitor bracket placement

Shelf and hook placements

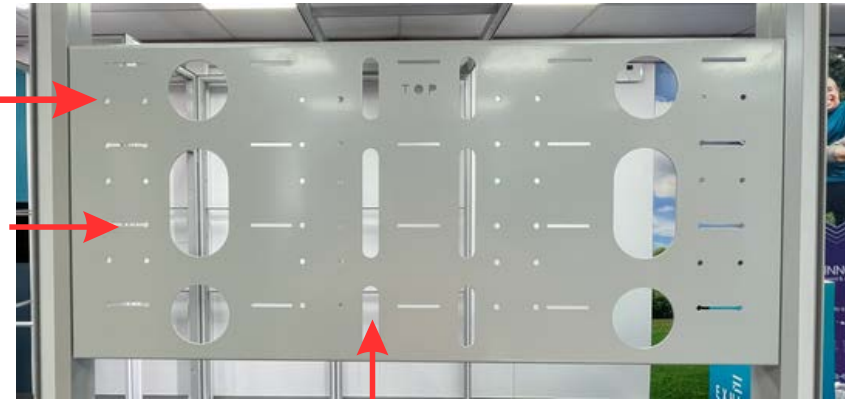


Space for monitor cables



Step 1

On the assembled panel, remove the bracing bars by twisting toward you and removing from the accessory slots in the uprights.

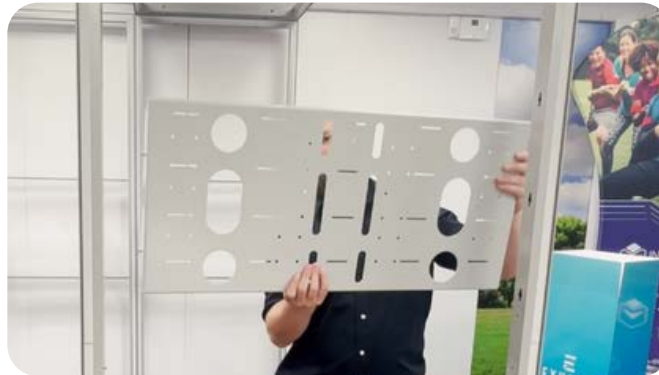

Step 2

Take the accessory bracket and slot into the uprights at the chosen height. You can use any of the accessory slots on the upright sections.



Step 3

Once in the accessory slots, apply light pressure to ensure the attachment has dropped into the locked position.





Step 4

Attach the panel over the top by lining up the corners of the graphic with the frame and connecting with the fitted hook and loop tape, pressing as you roll the panel down to the base.

Exhibit Exhibition Stand - Attaching the monitor bracket


Possible monitor bracket placement guide.

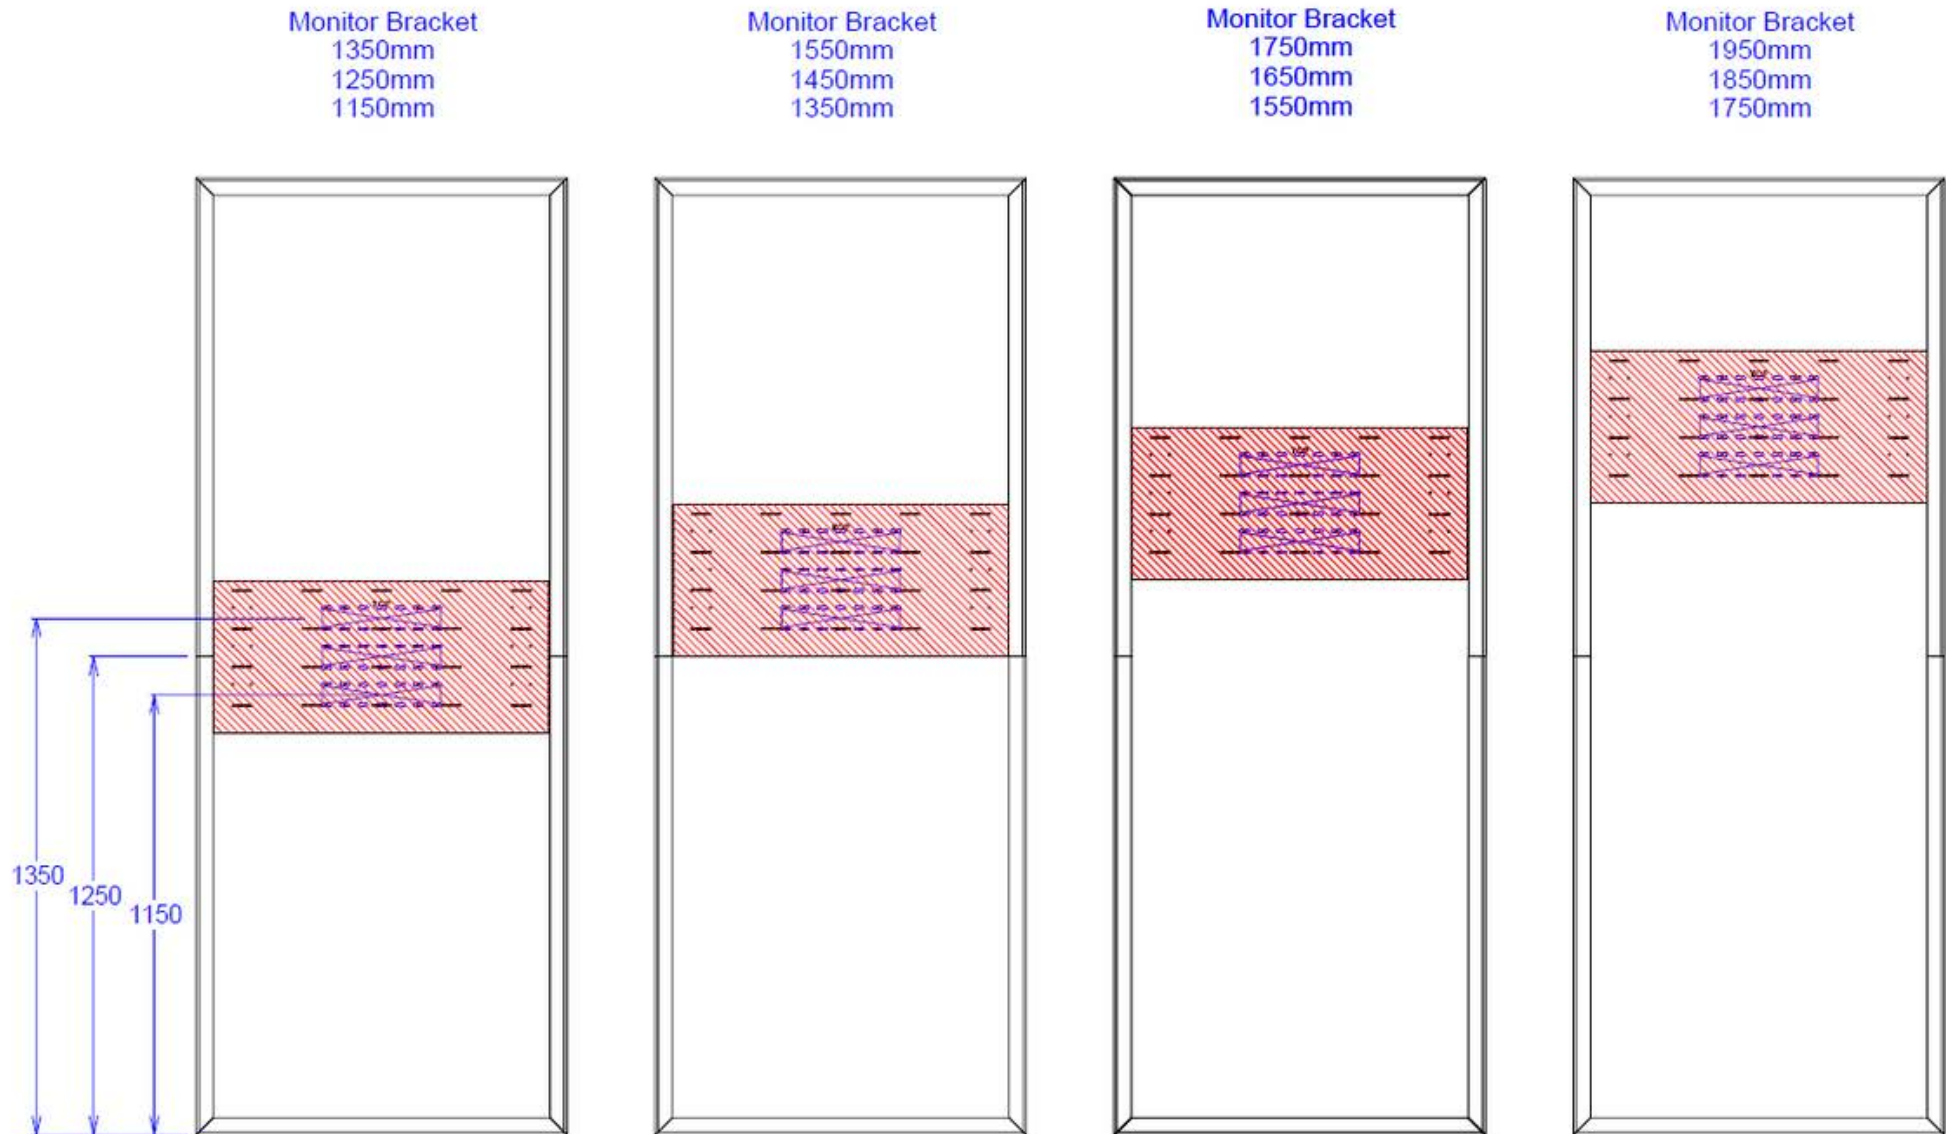

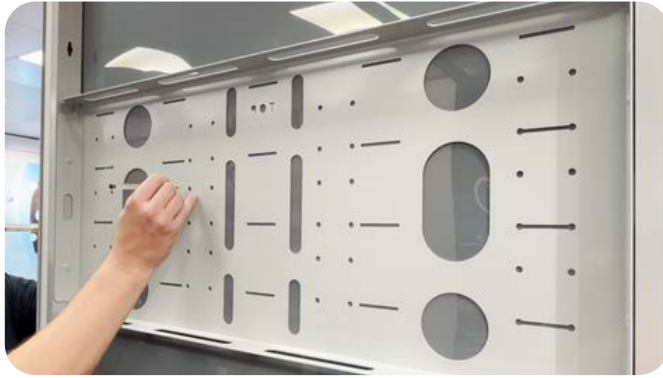

Step 1

Go around to the back of the panel, whilst holding the front of the panel in place with your hand. Mark on the back of the panel where you'd like to make cutouts for the bracket screws.

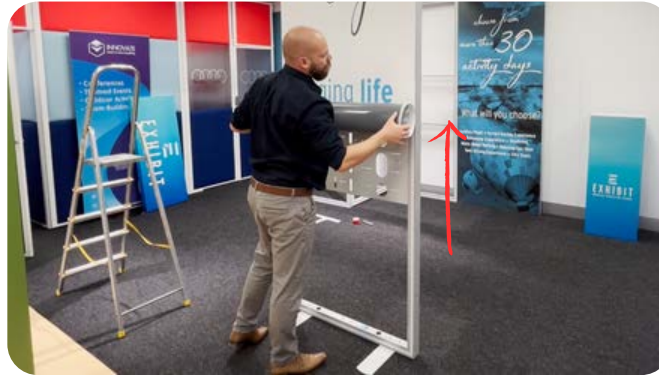

Step 2

Roll the panel up from the base, so the tape and reverse of the panel is toward you and the print rolled in the centre.



Step 3

Lay the marked panel on the floor, reverse side up. With a Stanley Knife, make small X's through the marks made for the monitor bracket.



Step 4

Re-attach the panel back into place, over the top of the accessory panel.



Step 5

Once the panel has been attached, use a screw driver to push through the cut marks, ready for the screws.



Step 6

Take the back of the Monitor bracket and push 2 screws through the top of the bracket, pushing through the graphics and accessory bracket.



Step 7

Centralise the monitor bracket and push 2 more screws into the bottom.



Step 8

Once you're happy with the placement, go to the back of the panel and on the screw thread add 1 washer and 1 bolt. Complete this process on all 4 screws and tighten from the front with a screwdriver.



Step 9

To fit the monitor arms, line the hole in the bracket arms with the holes on the back on your monitor.




Step 10

Place the black washers under the bracket arm to line up with the holes in the monitor.



Each bracket is supplied with multiple size screws, select the correct size, add the washer and attach through the monitor arm, screwing into the back of the monitor.

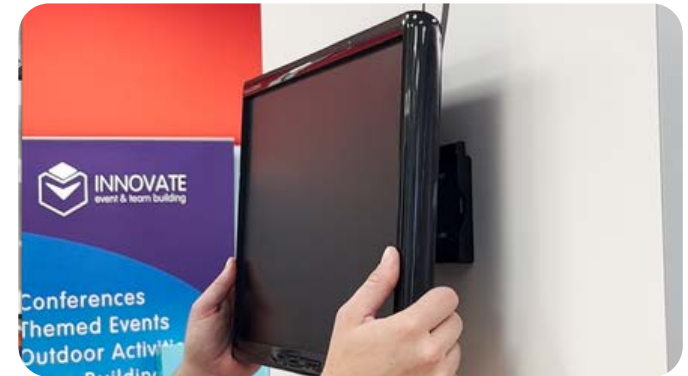

Step 11

Once the bracket is attached to the back of the monitor, hook the TV on to the fixed bracket on the Exhibit panel.